

AQUARAY® SMP-WW

UV Systems

UV

The Aquaray® SMP-WW range offers compact and high efficiency system for small and medium waste water plant with a range of flow rates from 20 to 350m³/h with exceptional reliability and ease of operation.

APPLICATIONS

- Wastewater Disinfection
- Wastewater Reuse
- Grey Water
- Camp Grounds
- Hotels, Hospitals
- Restaurants
- Marine

MAIN CHARACTERISTICS

- Multi emission medium pressure Lamp
- Power step regulation
- Simple control logic

MAIN FEATURES

- Polychromatic medium pressure lamps for highest germicidal efficiency
- Fewer lamps
- Data logging up to one year
- Easy to install in new or existing waste water plants
- User friendly operator interface microprocessor controlled

UV TECHNOLOGY : SMP-WW

The Aquaray® SMP-WW units have been designed to disinfect waste water. The germicidal effect of the UV light inactivates most micro-organisms such as bacteria, viruses and parasites.

The medium pressure lamps have an action on nucleic acid and proteins for micro-organisms inactivation.

The UV dose (UV Intensity x contact time) defines the treatment efficiency which is provided by the unit. The effective dose applied depends on the UV transmittance of water to be treated as well as the proper hydraulic design of the unit.

HOW IT WORKS

The medium pressure lamps are powered by magnetic ballasts. The lamps are inserted in pure quartz sleeves isolating them from the water. The lamps can be easily changed when indicated by the micro-processor control unit.

A UV sensor is installed to monitor UV intensity. The reactor is fitted with an automatic wiper system for cleaning the UV lamp quartz sleeves.



PRODUCT HIGHLIGHTS

- > Polychromatic medium pressure lamp
- > Data logging up to one year
- > Fewer lamps
- > Automatic mechanical wiper

TECHNICAL DATA SMP-WW Model	Flow Rate ⁽¹⁾ (m ³ /h)	Total Lamp Power (kW)	Reactor (mm)												In-Out	Control Panel: L x H x W (mm)
			A	B	C	D	E	F	G	H	J	K	L	M		
SMP 150-75-1/2	20	1.5	150	150	700	145	1065	225	900	700	120	150	125	285	DN 80	600 x 600 x 210
SMP 150-75-1	40	3	150	150	700	145	1065	225	900	700	120	200	125	285	DN 80	600 x 600 x 210
SMP 200-150-2	82	6	200	175	600	195	1065	275	900	700	170	200	150	285	DN 150	800 x 1200 x 300
SMP 250-150-3	126	9	250	200	600	195	1065	325	900	700	220	250	175	285	DN 150	800 x 1800 x 500
SMP 250-150-4	168	9	250	200	600	195	1065	325	900	700	220	250	175	285	DN 150	800 x 1800 x 500
SMP 250-200-3	253	18	250	200	900	220	1415	325	1250	1000	220	250	175	285	DN 200	800 x 1800 x 500
SMP 300-250-4	346	25	300	250	900	220	1415	375	1250	1000	270	300	200	285	DN 250	800 x 1800 x 500

Size connection flanges confirmed with proposal
 (1) Based on 35 mJ/cm² UV dose at 65% UV transmittance

TECHNICAL FEATURES

- Flanges: BS 4504 (PN10), or ANSI 150
- Reactor Pressure Rating: 10 barg
- Main Power Supply: 400-480V/3ph/50-60 Hz
- Panel Rating: IP54
- Conformity: CE

MATERIALS



- Reactor material: 316L stainless steel/quartz sleeve/silicon O-ring
- Panel material: polyester coated mild steel

OPTIONS

- Power step regulation
- Stainless steel panel

REMOTE CONTROL AND ALARMS

- Digital Inputs: lamp start-stop, water flow interlock
- Digital Outputs: system status, pre-alarm, alarm
- Analogue Output: remote indication of UV intensity

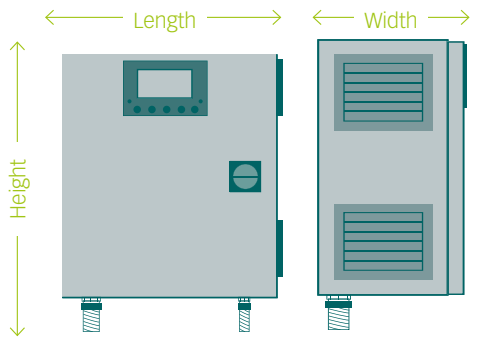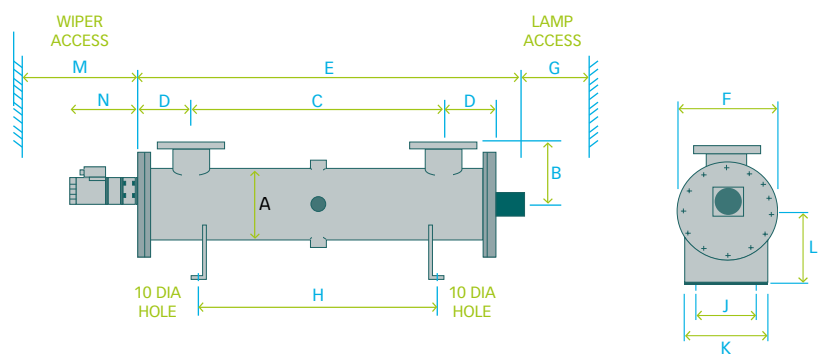

CONTACT

TRIOGEN Ltd
 Unit 14 Langlands Place
 East Kilbride G75 0YF
 Scotland, United Kingdom
 Tel: + 44 (0) 13 55 220 598
 Fax: + 44 (0) 13 55 570 058
 www.triogen.com
 info@triogen.com

Your local distributor:

